


MONTAGE MOUNTING	
P	Montage sur panneau / Panel mounted
TENSION AUXILIAIRE AUXILIARY SUPPLY	
L	AUX.1 18...72 V =
H	AUX.2 80...265 V ~
PRECISION DE MESURE PUISSANCE ET ENERGIE ENERGY AND POWER MEASUREMENTS ACCURACY	
O	Classe / Class 0,5
ENTREES LOGIQUES - CARTE G DIGITALS INPUTS - G CARD	
A	24V
B	3 Ent. logiques / Digital Inputs 110V
C	220V
CARTES OPTIONS (Nota 2) OPTION CARDS (Note 2)	
B	8 Ent. Logiques/Digital Inputs
C	5 Sort. Relais/Output Relays (2max.)
F	8x RTD Input (2max.)
J	2x LC 100Mb Eth (Optic fiber)
L	Serial Fiber (PP)
M	Serial Fiber (PG)
N	Serial Fiber (GP)
O	Serial Fiber (GG)

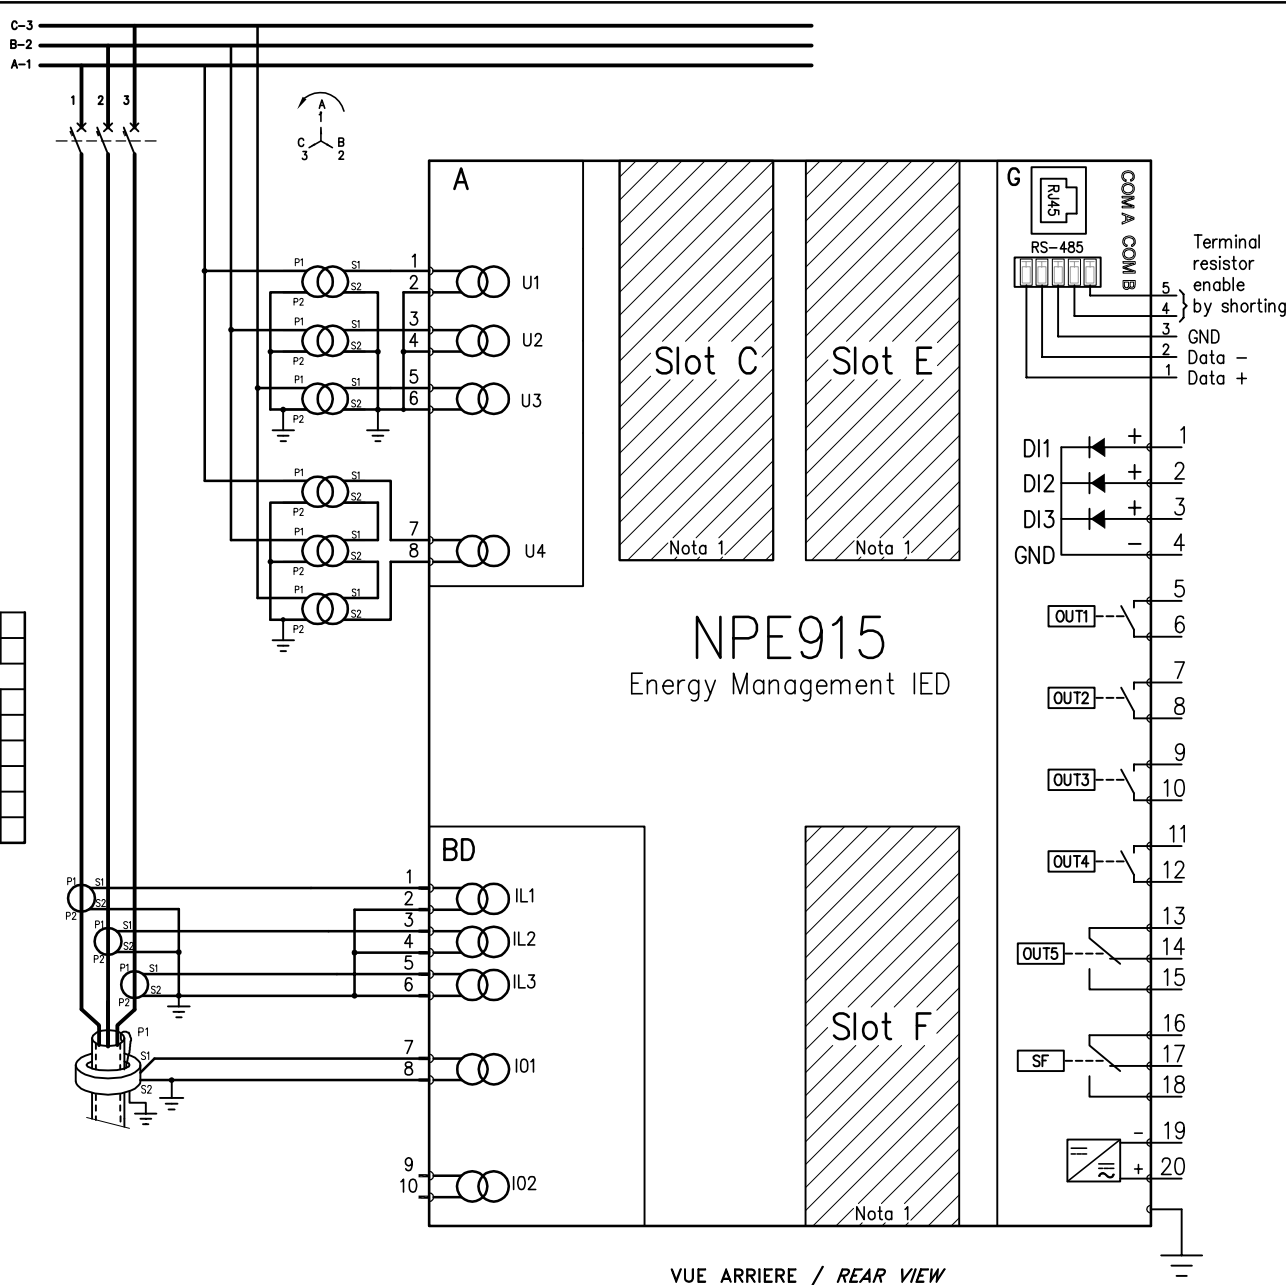

Nota 1: Cartes options cf. S42506 / Option Cards cf. S42506
 Nota 2: Un seul choix par colonne / One choice per column


NP900

PROTECTION NUMERIQUE
NUMERICAL PROTECTION

ANSI

[60]
[21FL]

BORNIER / TERMINALS
(vue arrière) / (rear view)

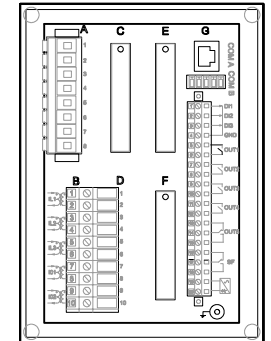

NPE915

B Le 29.03.17 VDL	DESSINE SSO	VERIFIE EFR	N° CAO 5144
A Diffusion Le 13.02.17 SSo	SCHEMA DE RACCORDEMENT CONNECTION DRAWING		1/1
S 42479			1/1

