


MONTAGE MOUNTING	
P Montage sur panneau / Panel mounted	
TENSION AUXILIAIRE AUXILIARY SUPPLY	
L	AUX.1 18...72 V =
H	AUX.2 80...265 V ≈
PRECISION DE MESURE PUISSANCE ET ENERGIE ENERGY AND POWER MEASUREMENTS ACCURACY	
8	CLASSE NON APPLICABLE CLASS NOT APPLICABLE
ENTREES LOGIQUES - CARTE G DIGITALS INPUTS - G CARD	
A	24V
B	3 Ent. logiques / Digital Inputs 110V
C	220V
D	24V
E	2 Ent. logiques / Digital Inputs 110V
F	[74TC] Choix obligatoire / Mandatory choice 220V
CARTES OPTIONS (Nota 2) OPTION CARDS (Note 2)	
B	8 Ent. Logiques / Digital Inputs
C	5 Sort. Relais / Output Relays (2max.)
D	Protec. d'Arc / Arc Protection (1max.)
F	8x RTD Input (2max.)
J	2x LC 100Mb Eth (Optic fiber)
L	Serial Fiber (PP)
M	Serial Fiber (PG)
N	Serial Fiber (GP)
O	Serial Fiber (GG)

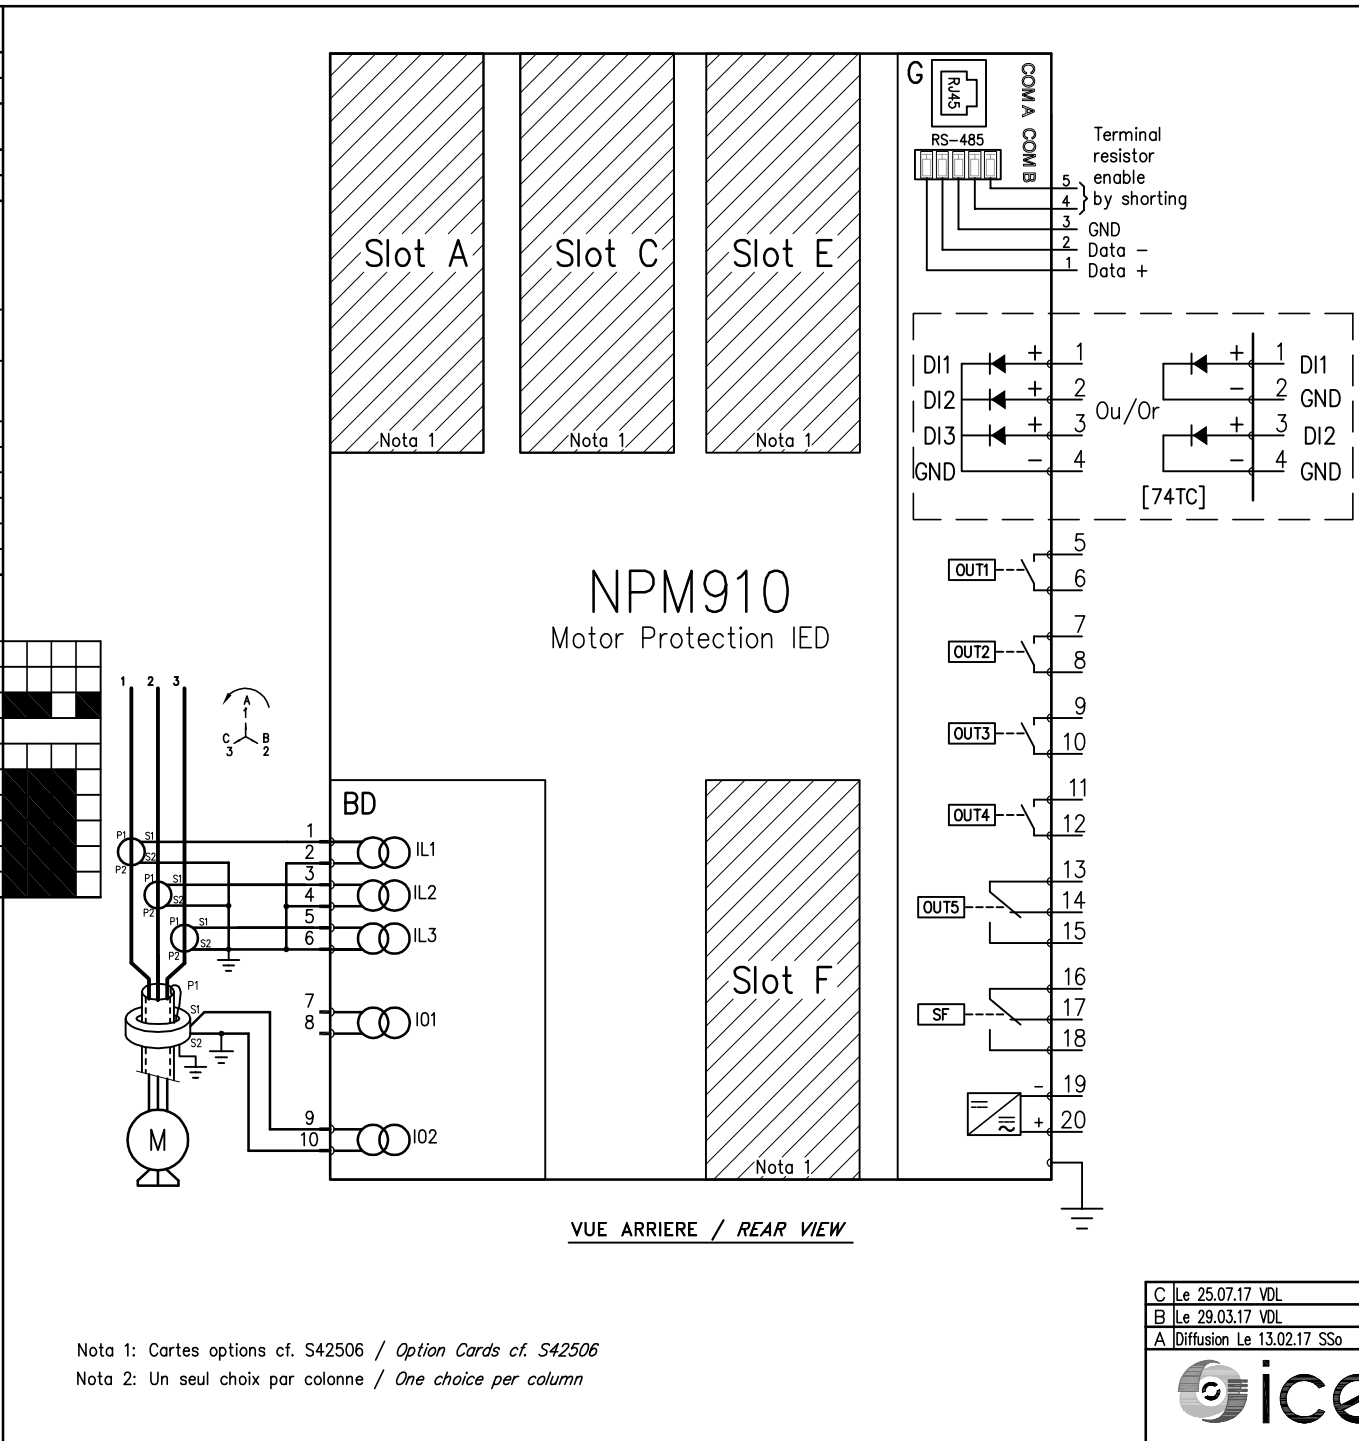

Nota 1: Cartes options cf. S42506 / Option Cards cf. S42506
 Nota 2: Un seul choix par colonne / One choice per column

NP900

**PROTECTION NUMERIQUE
NUMERICAL PROTECTION**

ANSI

[50/51]-[50N/51N]-[50H/51H/68H]
 [46R/46L/46]-[87N]
 [49M]-[48/14]-[66]-[37]-[51M]
 [50BF/52BF]-[74TC]

**BORNIER
(vue arrière) / TERMINALS
(rear view)**

NPM910

C	Le 25.07.17 VDL	DESSINE SSO	VERIFIE EFR	N° CAO 5144
B	Le 29.03.17 VDL			
A		Diffusion Le 13.02.17 SSo		

**SCHEMA DE RACCORDEMENT
CONNECTION DRAWING**

S 42471

1 / 1