


MONTAGE MOUNTING	
P	Montage sur panneau / Panel mounted
TENSION AUXILIAIRE AUXILIARY SUPPLY	
L	AUX.1 18...72 V =
H	AUX.2 80...265 V ~
PRECISION DE MESURE PUISSANCE ET ENERGIE MEASUREMENTS ACCURACY	
2	Classe / Class 0,2S
ENTREES LOGIQUES - CARTE G DIGITALS INPUTS - G CARD	
A	24V
B	3 Ent. logiques / Digital Inputs
C	110V
	220V
CARTES OPTIONS (Nota 2) OPTION CARDS (Note 2)	
B	8 Ent. Logiques / Digital Inputs
C	5 Sort. Relais / Output Relays (2max.)
F	8x RTD Input (2max.)
J	2x LC 100Mb Eth (Optic fiber)
L	Serial Fiber (PP)
M	Serial Fiber (PG)
N	Serial Fiber (GP)
O	Serial Fiber (GG)

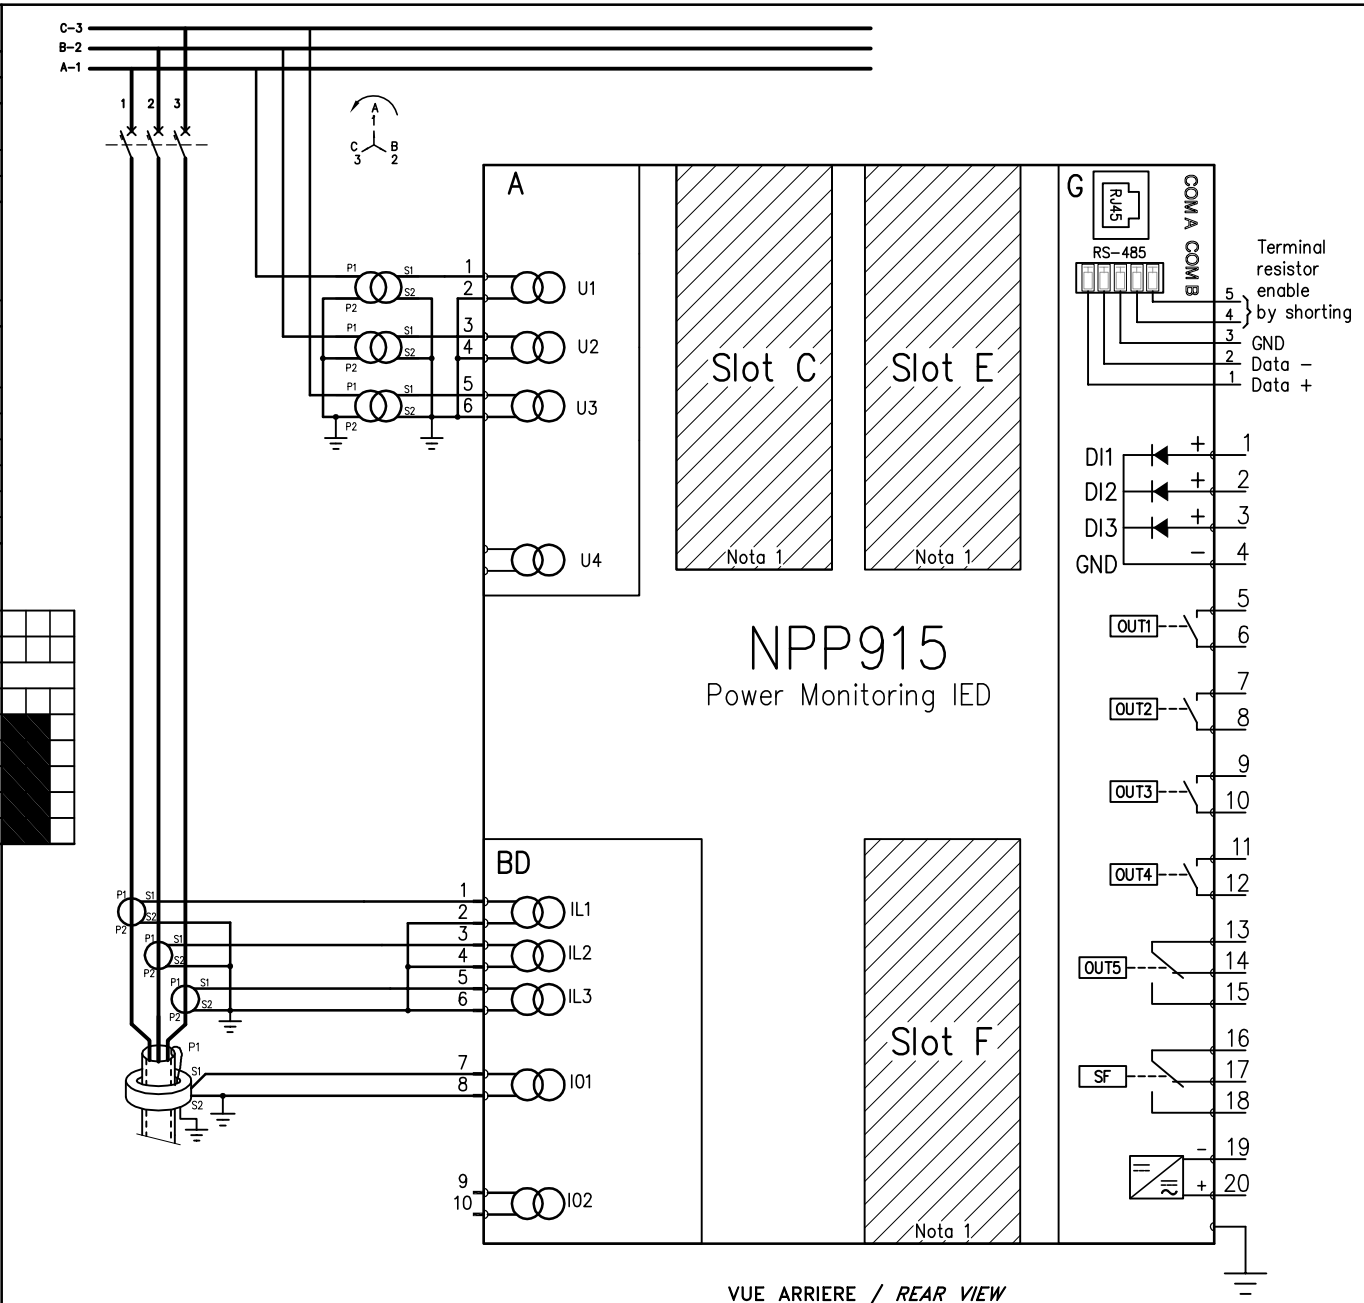


Nota 1: Cartes options cf. S42506 / Option Cards cf. S42506
 Nota 2: Un seul choix par colonne / One choice per column

NP900

**PROTECTION NUMERIQUE
NUMERICAL PROTECTION**

ANSI

BORNIER / TERMINALS
(vue arrière) / (rear view)

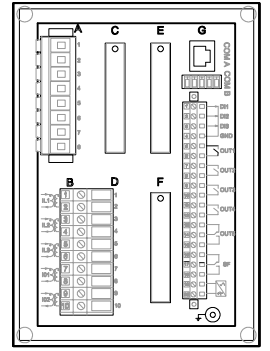

NPP915

B	Le 01.08.17 VDL	DESSINE	VERIFIE	N° CAO
A	Diffusion Le 29.03.17 SSo	SSO	EFR	5144
SCHEMA DE RACCORDEMENT CONNECTION DRAWING				1 / 1
S 42477				

