


MONTAGE MOUNTING	
P	Montage sur panneau / Panel mounted
TENSION AUXILIAIRE AUXILIARY SUPPLY	
L	AUX.1 18...72 V =
H	AUX.2 80...265 V ~
PRECISION DE MESURE PUISSANCE ET ENERGIE ENERGY AND POWER MEASUREMENTS ACCURACY	
O	Classe / Class 0,5
Bornes / Terminals BD CARD	
A	Standard
B	Cosses à oeillets / Ring lug
Code interne / Internal code	
A	Code interne / Internal code
ENTREES LOGIQUES - CARTE G DIGITALS INPUTS - G CARD	
A	24V
B	3 Ent. logiques / Digital Inputs
C	110V
D	220V
E	24V
F	2 Ent. logiques / Digital Inputs
[74TC]	Choix obligatoire / Mandatory choice
110V	
220V	
Code interne / Internal code	
A	Code interne / Internal code
CARTES OPTIONS (Nota 2) OPTION CARDS (Note 2)	
B	8 Ent. Logiques/Digital Inputs
C	5 Sort. Relais/Output Relays (2max.)
D	Protec. d'Arc/Arc Protection (1max.)
F	8x RTD Input (2max.)
J	2x LC 100Mb Eth (Optic fiber)
L	Serial Fiber (PP)
M	Serial Fiber (PG)
N	Serial Fiber (GP)
O	Serial Fiber (GG)

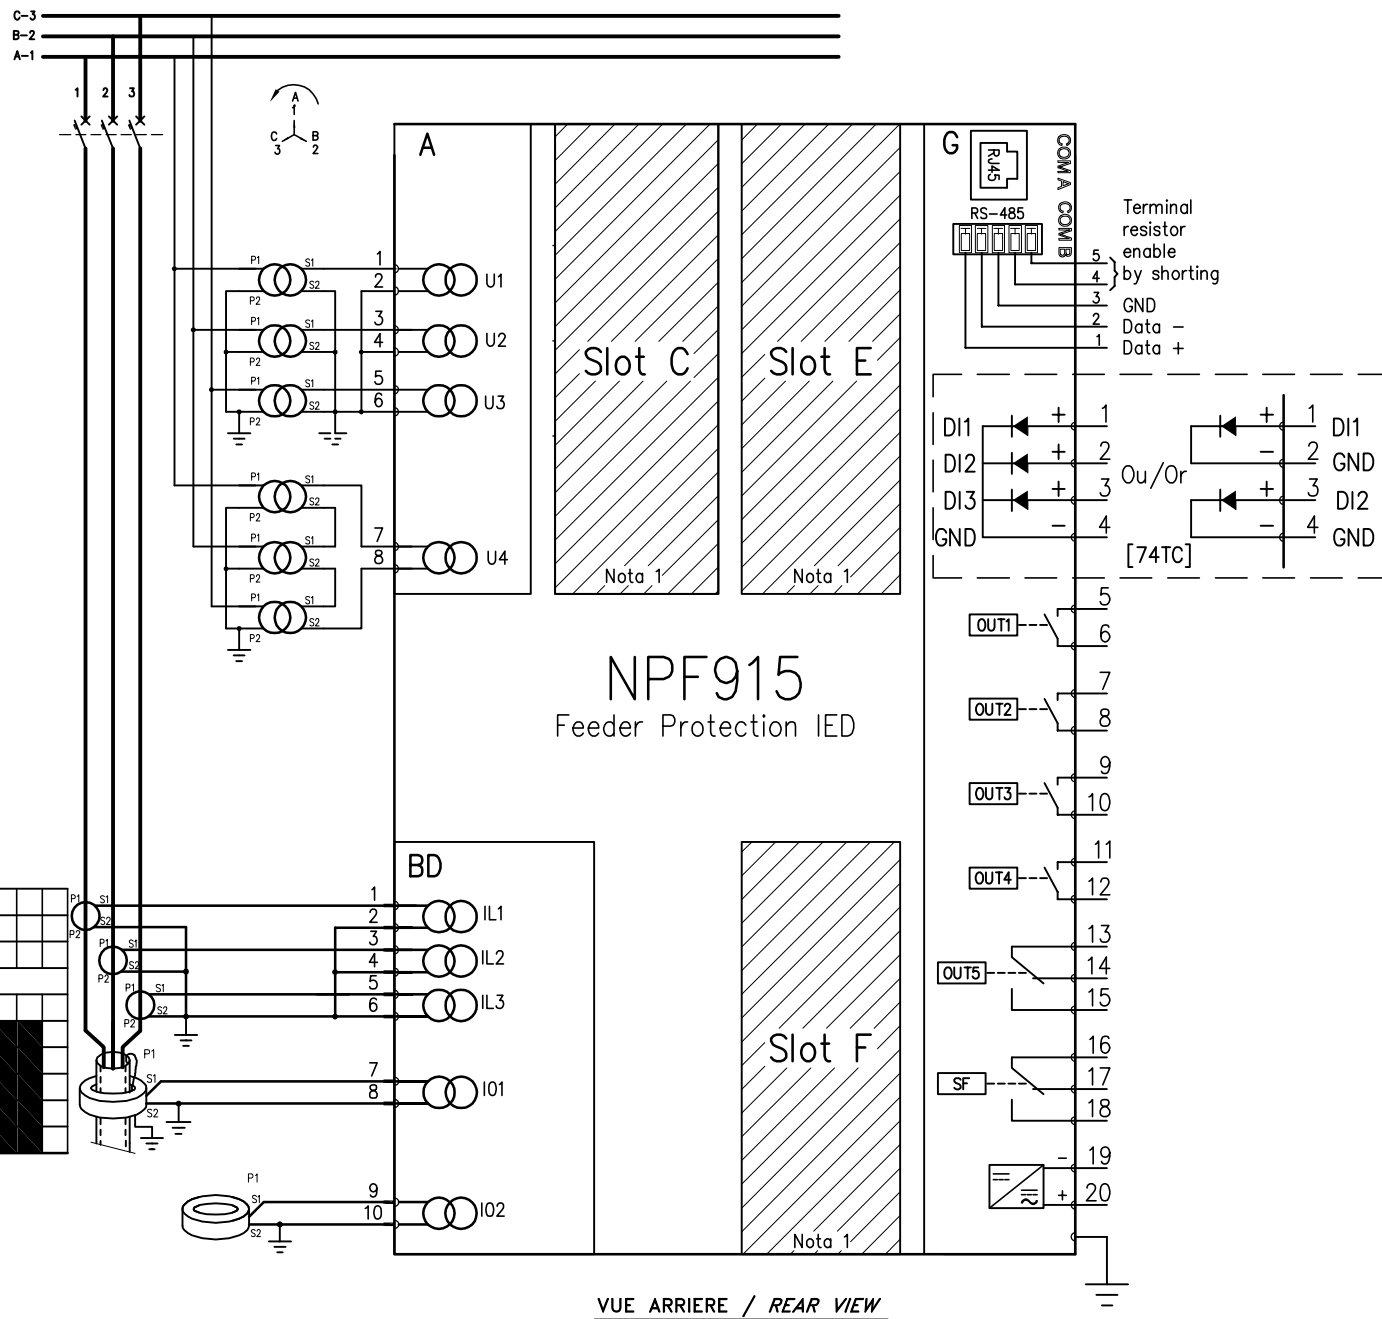

NPF915
Feeder Protection IED

VUE ARRIERE / REAR VIEW

Nota 1: Cartes options cf. S42506 / Option Cards cf. S42506
 Nota 2: Un seul choix par colonne (option A si pas de carte optionnelle) /
 One choice per column (Option A without option card)


NP900

PROTECTION NUMERIQUE
NUMERICAL PROTECTION

ANSI

- [50/51]-[50N/51N]-[50H/51H/68H]
- [46R/46L/46]-[49L]-[87N]
- [67]-[67N]-[59]-[27]
- [59P/27P/47]-[59N]-[810/U]
- [81R]-[78]-[32R/37/32]-[25]
- [50BF/52BF]-[21FL]-[60]
- [79]-[68]-[74TC]

BORNIER / TERMINALS
(vue arrière) / (rear view)

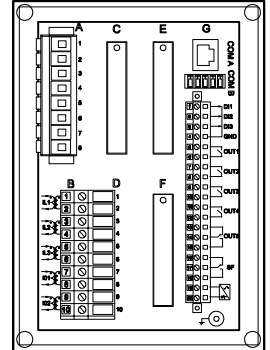

NPF915

B	Le 26.01.17 SSo	DESSINE	VERIFIE	N° CAO
A	Diffusion Le 23.01.17 SSo	SSO	EFR	5144



SCHEMA DE RACCORDEMENT CONNECTION DRAWING		1/1
S 42463		

E	Le 25.04.18 TLO
D	Le 01.08.17 VDL
C	Le 21.03.17 VDL